

LEVEL INDICATOR PFG57

Product line: **Rotary**

Small-sized bladed level particularly suitable for use on small tanks or batching cells. Version with male thread 1"1/2 Gas.

ADVANTAGES

- An **EASY TO INSTALL** instrument that does not require any calibration, maintenance or specific tool for its installation.
- Thanks to the wide choice of paddles, all of which are interchangeable, it is **ADAPTABLE** to the different densities of the measured materials.
- Extremely **VERSATILE**, it can be installed on tanks, hoppers, on walls or roofs of silos, in a vertical, horizontal or oblique position.
- **CUSTOMIZABLE** with paddles, extensions, voltages.
- Protection degree of enclosures for electrical equipment **IP65**.
- **DURABLE** and **RELIABLE** with aluminium casing, stainless steel shaft on ball bearings and electrical connection via anti-vibration faston terminals. Works with ambient temperatures from -20° to +70°C.
- On request:
4 RPM: A faster rotation of the paddle reduces the intervention time of the level indicator.



Solids



ATEX CERTIFICATE FOR DUST ZONE 20/21


LEVEL INDICATOR

PFG57

Product line: Rotary



Solids

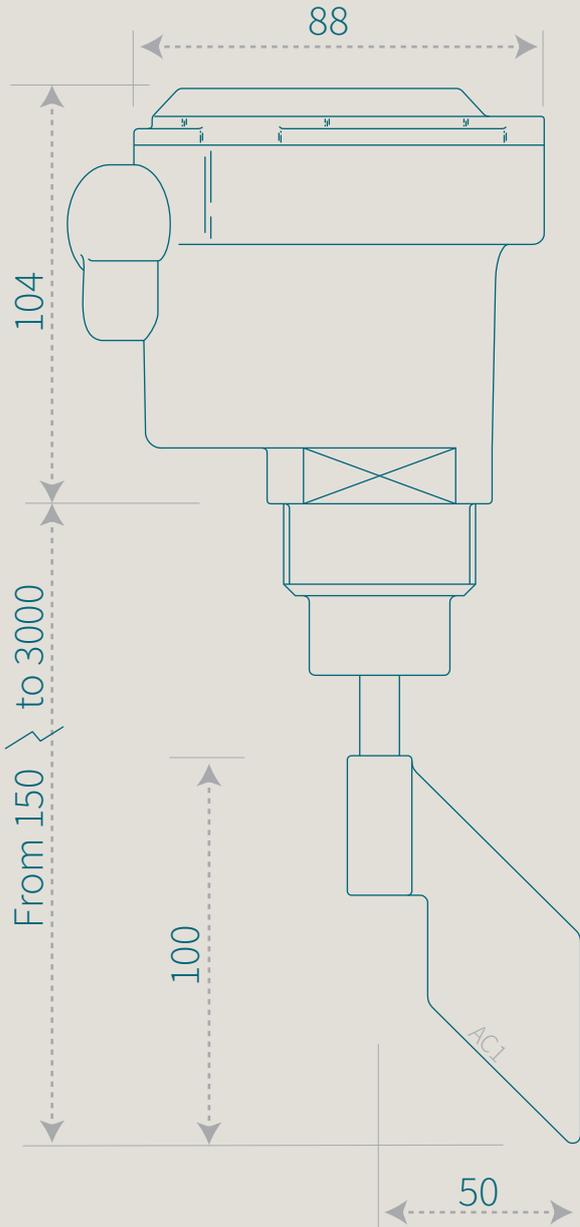

Customizations



110/220 V AC



24/48 V AC



24 V DC



4 RPM

Lamp



220VAC



110VAC



48VAC



24VAC



24VDC



Aluminium
nut 1"1/2Gas



Aluminium
flange 1"1/2Gas



Stainless Steel
flange 1"1/2Gas



Iron sleeve
1"1/2Gas



Iron extension with protection
from 150 to 3000 mm



Stainless steel extension with protection
from 150 to 3000 mm

Stainless steel




AC1



AC3



AC4



AC5




AC5L




AC6




AC7




AC8




AC9



AC10



AC11



AC12



AC14



AC15



AC16

Nylon6



AC1



AC2



AC4



AC9



AC13